



UV 800W Germicidal Flood Lamp

Feature:

High UV-C light intensity

Wide beam spread

135 V to UV lamp for added electrical safety

Fan Cooled


Elapsed hour counter for service scheduling

230 V or 115 V / 50 Hz

60 Hz options available

Filter glass assembly is fitted to a hinged front door, enabling easy access for UV bulb replacement and cleaning

A high intensity discharge UV 800W UV-C bulb produces a spectral output which is optimum for disinfection.

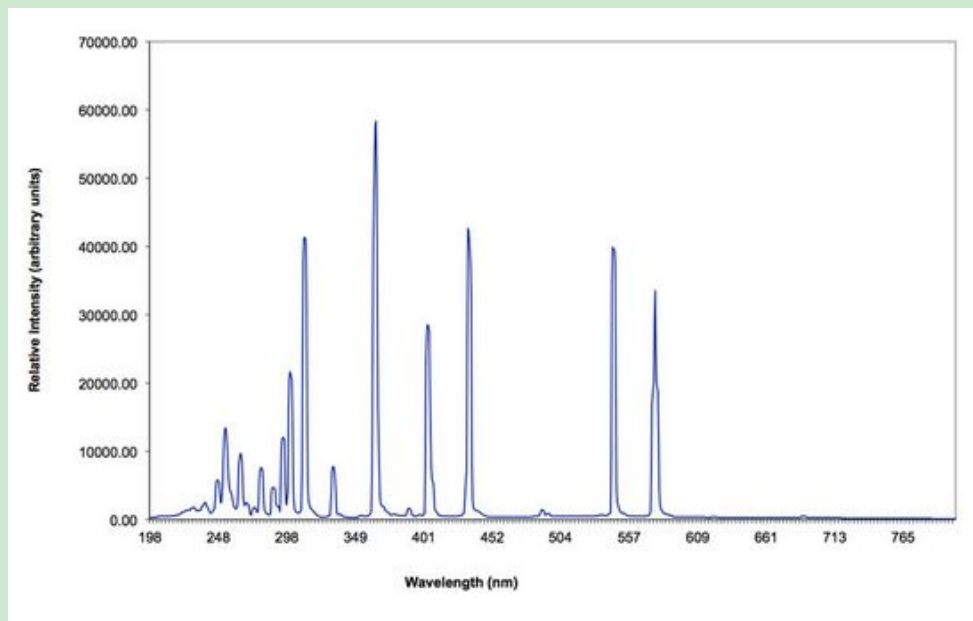

UV bulb life	Approximately 500 hours depending on age, environment, switching and cooling
Reflector	Aluminium - UVL full spectrum grade
Power supply	230 V or 115 V / 50 Hz (60 Hz options available)
Power	810 W
Noise	< 70 dB
Rating	IP 40
Integral fuse protection	2 x 6.3 A miniature time lag fuses - ceramic body 5mm x 20 mm
Thermal protection	Auto reset thermal cut out
Construction material	Sheet aluminium
Coating material	UV stable black polyester powder
Connecting cable length	3 m (extensions available)
Weight of UV lamp	Approximately 2 Kg

