

DIN RAIL / PANEL MOUNT, TRUE RMS



CR4110 CR4120  
CR4111

Single Element - 0.79" Window  
0.5 to 150 AAC Input Range



CR4150 CR4160

Two Element - 0.26" Window  
0.5 to 30 AAC Input Range



CR4170 CR4180

Three Element - 0.26" Window  
0.5 to 30 AAC Input Range

The **CR4100** Series True RMS Current Transducers and Transmitters are designed for applications where AC current waveforms are not purely sinusoidal. More precise and accurate than other transducers, these devices are ideal in chopped wave and phase fired control systems.

**Applications**

- Phase fired controlled heaters
- Quickly varying motor loads
- Chopped wave form drivers
- Harmonic currents

**Features**

- 35mm DIN Rail or Panel Mount
- Available with 0-5 VDC, 0-10 VDC, 4-20 mADC output
- 24 VDC powered
- Use with external current transformers
- Highest precision available
- Connection diagram printed on case

**Regulatory Agencies**

- Recognized to meet UL 61010B-1
- Constructed to meet CAN/CSA-C22.2, No. 61010-1-2004
- Meets requirement of IEC 61010-1 and BS EN 61010-1



**E199795**

Use a 5 Amp Secondary Current Transformer to extend the ranges of all CR Magnetics Current Transducers



All single phase current transducers are available in split core design. Simply put an "S" at the end of the prefix\*  
I.E. CR4110S-10  
**\* Not UL Recognized**

Add suffix for input range

PART NUMBERS			
CR4110(S)	-		Single element with 0 - 5 VDC output (split core design)
CR4111(S)	-		Single element with 0 - 10 VDC output (split core design)
CR4120(S)	-		Single element with 4 - 20 mADC output (split core design)
CR4150	-		Two element with 0 - 5 VDC output **
CR4160	-		Two element with 4 to 20 mADC output **
CR4170	-		Three element with 0 - 5 VDC output **
CR4180	-		Three element with 4 - 20 mADC output **

\*Two and three element transducers are available only in ranges of 0.5 to 30 AAC

- 5** - 0- 5 AAC \*\*
- 10** - 0-10 AAC \*\*
- 15** - 0-15 AAC \*\*
- 20** - 0-20 AAC \*\*
- 25** - 0-25 AAC \*\*
- 30** - 0-30 AAC \*\*
- 40** - 0-40 AAC
- 50** - 0-50 AAC
- 75** - 0-75 AAC
- 100** - 0-100 AAC
- 150** - 0-150 AAC



Ranges available up to and including 600 AAC

Transducers


**SPECIFICATIONS**

Basic Accuracy:.....	0.5%	Response Time:.....	250 ms max. 0-90%
Linearity:.....	10% to 100% FS	FS Relative Humidity:.....	80% for temperatures up to 31°C and decreasing linearly to 50% at 40°C
Calibration:.....	True RMS Sensing	Torque Specs:.....	3.0 inch lbs. (0.4Nm)
Thermal Drift:.....	500 PPM/°C	Weight:.....	0.5 lbs.
Operating Temperature:.....	0°C to +60°C	Supply Current:	
Installation Category:.....	CAT II	CR4110/11.....	Typical 15mA Max 25mA
Pollution Degree:.....	2	CR4120.....	Typical 25mA Max 40mA
Insulation Voltage:.....	2500 VDC	CR4150.....	Typical 25mA Max 75mA
Vibration Tested To:.....	IEC 60068-2-6,1995	CR4160.....	Typical 40mA Max 70mA
Altitude:.....	2000 meter max.	CR4170.....	Typical 20mA Max 60mA
Frequency Range:.....	20 Hz - 5 KHz	CR4180.....	Typical 55mA Max 110mA
MTBF:.....	Greater than 100 K hours	CR4110S.....	Typical 15mA Max 25mA
Cleaning:.....	Water-dampened cloth	CR4120S.....	Typical 25mA Max 40mA
Supply Voltage:.....	24 VDC ± 10%		
Output Load:.....	4-20 mADC - 0 to 300 Ω		
	0-5 VDC - 2K Ω or Greater		


Transducers

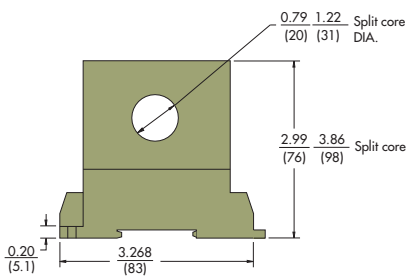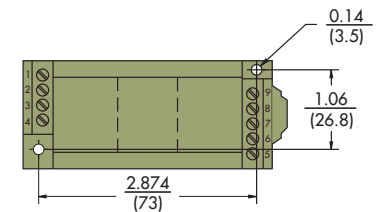


1 hole: 0.79(20) Dia. for CR4110, CR4111 & 4120 (shown)  
 2 holes: 0.26(6.5) Dia. for CR4150 & 4160  
 3 holes: 0.26(6.5) Dia. for CR4170 & 4180

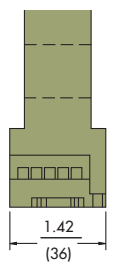


**OUTLINE DRAWING**

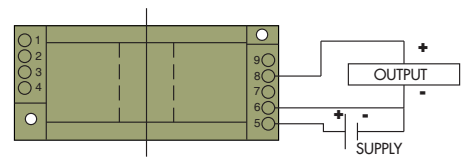


**CR4110** One Element 0 - 5 VDC Output  
**CR4111** One Element 0 - 10 VDC Output

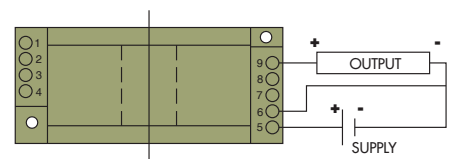


**CR4120** One Element 4 - 20 mADC Output

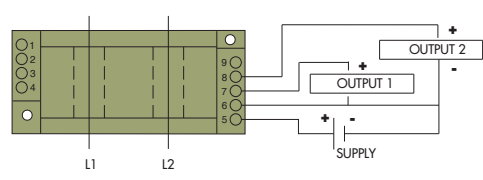


**CR4150** Two Element 0 - 5 VDC Output

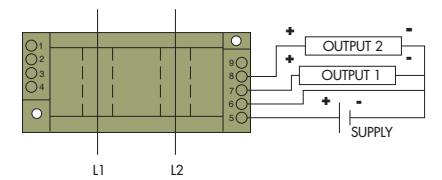

**CR4160** Two Element 4 - 20 mADC Output

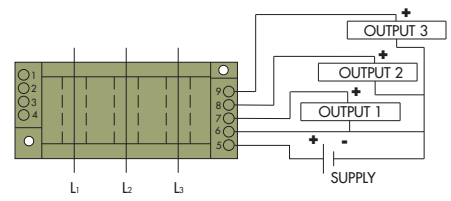

**CR4170** Three Element 0 - 5 VDC Output

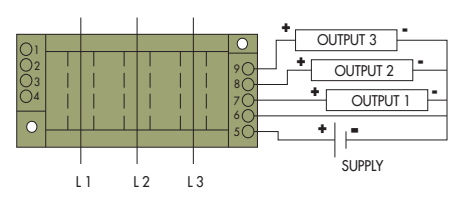

**CR4180** Three Element 4 - 20 mADC Output

**CONNECTION DIAGRAM**

NOTE: The building installation must have a switch or circuit-breaker that is in close proximity and within easy reach of the operator. The switch or circuit breaker shall be marked as the disconnecting device for the equipment.