

## IRU-3430 Self Contained Ultrasonic Level Sensor




### Flexible by Design

The IRU-3430 series provides a non-contact method of detecting level, presence/absence detection, volume, proximity and distance. With built in technology to compensate for unpredictable variables such as humidity, temperature and agitators the IRU-3430 is the right sensor for your application.

#### Features

- AutoSense Software for hassle-free setup
- Internal Temperature Compensation
- Works on solids and liquids

# IRU-3430 Specifications

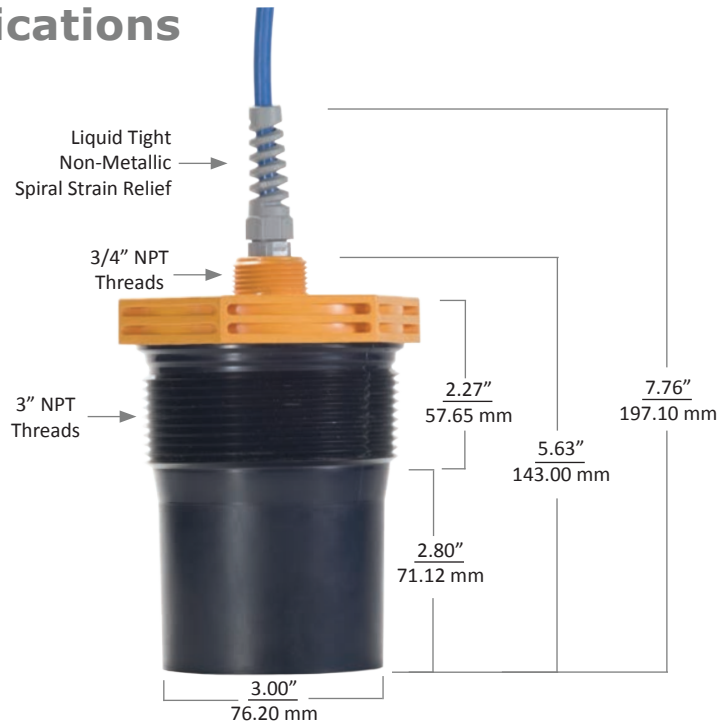

## Performance

- Operating Range: 1.25 - 50 ft. (0.4 - 15.2 m)
- Beam Pattern: 9° off axis
- Internal Temperature Compensation
- Frequency: 43 kHz
- Accuracy: ±0.25% of detected range
- Resolution: 0.1 in. (2.5 mm)
- Response Time: Programmable (20 ms minimum)

## Connectivity

Output:

- 4-20 mA
- 4-20 mA with (2) NPN outputs

## Environmental

- Ratings: IP65
- Operating Temp: -40° - 140°F (-40° - 60°C)

## Certification

- Class 1, Div. 2, Groups A, B, C, D
- IP65

## Electrical

- Total Current Draw: 75 mA @ 24 VDC
- Supply Voltage: 12-28 VDC
- Wiring Connection: 4 or 5 conductor shielded cable

## Programming

- Interface with RST-3001 Programmer (purchase separately - powered by USB)
  - The RST-3001 is 32 bit only
  - The RST-3002 is 32 and 64 bit compatible
- User selected units of measure

## Physical

- PC/PET upper housing
- PC/PET Blend Transducer

## Options

Part Number: IRU - 343 \_\_\_\_\_ - \_\_\_\_\_  
  A                    B

### A. Output

- 3** 4-20 mA
- 5** 4-20 mA with (2) NPN outputs

### B. Cable/Microconnector

- CL** Cable (Specify L=length in feet)  
Standard 6 feet of cable
- M** Micro Connector

## IRU-3430 Accessories


Please order separately, by part number.

Description	Part Number
<b>Over Molded Extension Cables with Foil Shield</b>	
<b>4 Conductor</b>	
Straight, 2 m	135407-0002
Right Angle, 2 m	135407-1002
Straight, 5 m	135407-0005
Right Angle, 5 m	135407-1005
<b>5 Conductor</b>	
Straight, 2 m	135415-0002
Right Angle, 2 m	135415-1002
Straight, 5 m	135415-0005
Right Angle, 5 m	135415-1005
<b>Programming Module</b>	
RST-3001 (USB - 32 bit only)	125389
RST-3002 (USB - 32 and 64 bit compatible)	125389-1000

## Wiring

IRU-3433-C	
<b>Red</b>	+24 VDC
<b>Black</b>	Ground
<b>White</b>	mA+

IRU-3433-M	
<b>1 Brown</b>	+24 VDC
<b>2 White</b>	Not used
<b>3 Blue</b>	Ground
<b>4 Black</b>	mA+
<b>5 Grey</b>	Not used



IRU-3435-C			
<b>Red</b>	+24 VDC	<b>Orange</b>	mA+
<b>Black</b>	Ground	<b>Green</b>	NPN2
<b>White</b>	NPN1		

IRU-3435-M	
<b>1 Brown</b>	+24 VDC
<b>2 White</b>	NPN 1
<b>3 Blue</b>	Ground
<b>4 Black</b>	mA+
<b>5 Grey</b>	NPN 2

